

ECO-BRK-8A-LKFS

8" Architectural Downlight



Project:	
Type:	
Catalog #:	

STANDARD



FEATURES

- Field selectable 3000k (warm white) 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 56,000 hours of operation.**
- Color rendering index (R_a) > 90.
- Field selectable lumen output – 2,000, 3,000, 4,000 or 5,000 nominal lumens.
- 53 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- 1-10VDC dimming is standard.
- Aluminum housing with white slim reflector.
- Easy installation in new construction or retrofit applications.
- Standard (included) junction box can be remote mounted or be attached to the luminaire
- Compatible with 8.06" ceiling cut-outs and 8" mounting frames.
- Type non-IC. Access above ceiling required.
- This device is not intended for use with emergency exits.

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.



WARRANTY & LISTINGS

- cETLus listed for wet locations.
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class A.
- Complies with EN61000-4-5 surge protection (line-neutral, 1kV).
- 5-year warranty of all electronics and housing.

DIMENSIONS

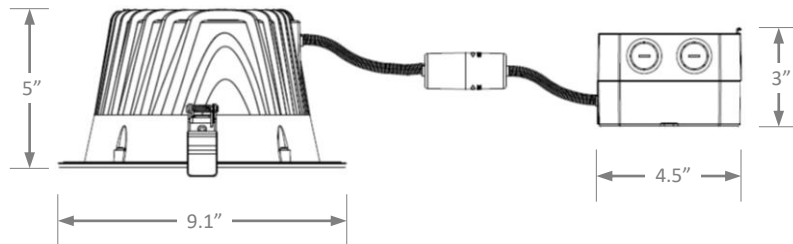

Weight: 3 lbs.

ORDERING INFORMATION

Example: ECO-BRK-8A-LKFS

Series	Lumen Output/ Color Temperature	Lumen Output/ Color Temperature	
		Selectable Lumens	Selectable CCT
ECO-BRK-8A	LKFS*	2,000 lm	3000k
		3,000 lm	3500k
		4,000 lm	4000k
		5,000 lm	5000k
	*Field selectable		

3379 Peachtree Road NE, Suite 655, Atlanta, GA 30326 •
Phone: (470) 995-0896 • Fax: (470) 995-0897 • Website: www.ecolumeled.com