## **ECO-CEXTEU**

## Remote Capable Compact Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	



STANDARD

**OPTIONAL** 













## ILLUMINATION

 Long-lasting, energy efficient Red or Green LED EXIT sign illumination

#### **ELECTRICAL**

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- 3.0W of remote capacity standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap thermoplastic mounting canopy included provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

#### HOUSING

 Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


## OPTIONS

- SPV: UL Listed for special voltage option.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

#### **WARRANTY / LISTING**

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

#### **DIMENSIONS**

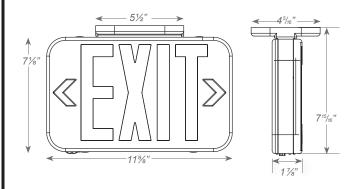

#### ORDERING INFORMATION

Sample Part Number: ECO-CEXTEU3RW

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
ECO-ETXTEU	3	Universal Single/Double	R	Red	W	White	SDT	Self-Diagnostics <sup>1</sup>
		Face	G	Green	В	Black	SPV	120/230 Volt 50/60Hz <sup>1</sup>
			RG	Red/Green				

1 Not available with RG units.

NOTES:

## **ECO-CEXTEU**

# Remote Capable Compact Thermoplastic Exit Sign



Project:	
Туре:	
Catalog #:	

### ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)			
	120V	230V	277V	120V	230V	277V	
ECO-CEXTEU RG	1.2	N/A	1.2	0.12	N/A	0.12	
ECO-CEXTEU RED/GREEN	1.2	1.2	1.2	2 1	. 0.12	0.12	
ECO-CEXTEU RED SDT	3.0	3.0	3.0	0.05	0.05	0.05	
ECO-CEXTEU GREEN SDT	2.7	2.7	2.7	0.05	0.05	0.05	

### REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY		COMPA	TIBLE RE	MOTE HE	AD FAMILY
		CAPACITY	RHLED	MRHLED	RH16LED	SRHLED
ECO-CEXTEU	3.6V	3.0W	Х	хх		